

PX7-6 6Volt 7Ah

Specifications

Nominal Voltage(V)				6V
Nominal Capacity				
20 hour rate	(0.35A to	5.25V)		7Ah
10 hour rate	(0.665A to	5.25V)		6.65Ah
5 hour rate	(1.19A to	5.1V)		5.95Ah
1 C	(7A to	4.8V)		3.97Ah
3 C	(21A to	4.8V)		2.8Ah

Weight Approx. 1.2kg(2.64Lbs.)

Internal Resistance (at 1KHz) Approx. 12 mΩ

Maximum Discharge Current for
5 seconds: 105A

Charging Methods at 25°C(77°F)

Cycle use:
Charging Voltage 7.20 to 7.50V
Coefficient -5.0mV/ °C/cell
Maximum Charging Current : 2.1A
Standby use:
Float Charging Voltage 6.75 to 6.90V
Coefficient -3.0mV/ °C/cell

Operating Temperature Range

Charge	-15°C(5°F)	to	40 °C(104°F)
Discharge	-15°C(5°F)	to	50 °C(122°F)
Storage	-15°C(5°F)	to	40 °C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	92%
3 month	90%
6 month	80%



Case Material ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Terminal F1 or F2 (Faston Tab 187 or 250)


Dimensions

mm(inch)

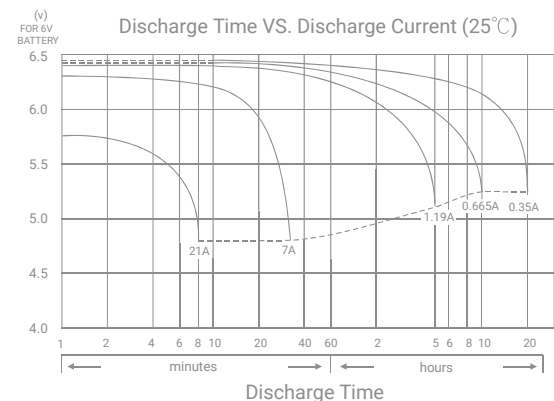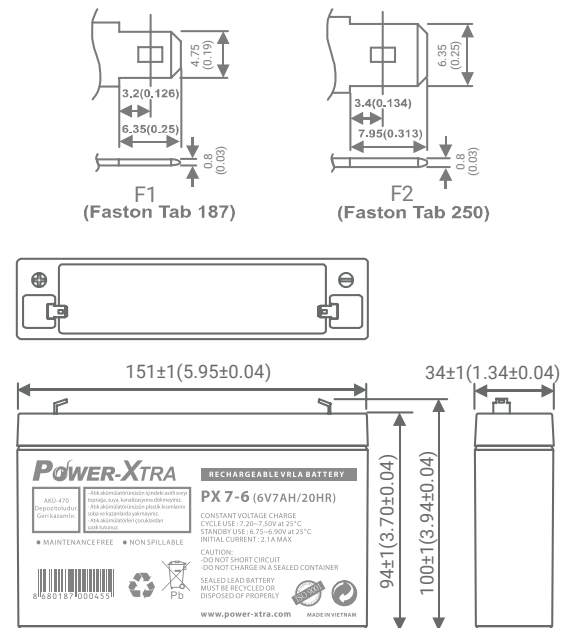


PX7-6 6Volt 7Ah


Effect of Temperature on Capacity 25°C(77°F)

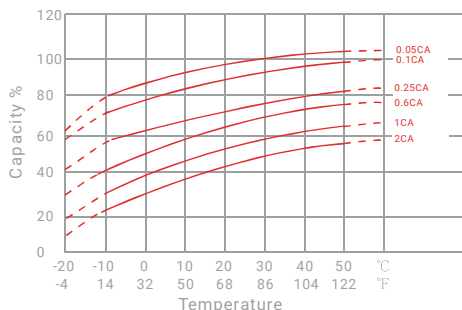


Capacity Retention Characteristic

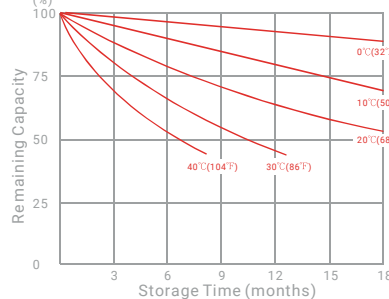

Trickle (or float) Service Life



Cycle Service Life

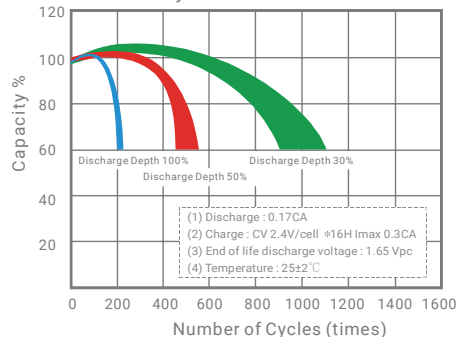

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.8V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	45.2	50.3	52.7	54.8	55.8	56.7	58.2
10	min	30.7	32.2	33.7	34.8	35.7	36.2	37.2
15	min	24.5	25.5	26.2	26.8	27.0	27.5	28.2
30	min	13.0	13.7	14.1	14.5	14.6	14.7	14.9
60	min	8.43	8.73	8.97	9.15	9.22	9.30	9.45
120	min	4.21	4.39	4.63	5.22	5.27	5.32	5.40
180	min	3.27	3.45	3.60	3.73	3.77	3.82	3.87
240	min	2.87	3.01	3.10	3.15	3.17	3.20	3.23
300	min	2.47	2.54	2.63	2.68	2.70	2.72	2.73
600	min	1.45	1.50	1.53	1.55	1.56	1.56	1.57
1200	min	0.694	0.718	0.737	0.750	0.755	0.760	0.770

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.8V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	23.5	26.4	28.1	29.7	30.5	31.3	32.6
10	min	16.2	17.0	18.2	18.6	18.8	19.1	19.8
15	min	12.5	13.1	13.6	13.9	14.0	14.2	14.5
30	min	6.61	6.92	7.14	7.30	7.38	7.45	7.61
60	min	3.98	4.13	4.25	4.36	4.39	4.42	4.48
120	min	2.05	2.14	2.21	2.27	2.29	2.32	2.35
180	min	1.63	1.69	1.75	1.80	1.82	1.84	1.87
240	min	1.30	1.37	1.42	1.45	1.46	1.47	1.49
300	min	1.11	1.16	1.23	1.25	1.26	1.27	1.28
600	min	0.650	0.680	0.721	0.728	0.732	0.737	0.747
1200	min	0.341	0.357	0.377	0.382	0.384	0.387	0.392

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min ≤X<10min(+12%~-12%), 10min ≤X < 60min(+8%~-8%), X ≥60min(+5%~-5%)